



# 24" SHOCKS



## "Million Mile Warranty"

YOU BREAK IT... WE REPLACE IT, FOR FREE, FOR LIFE!

## 24" RACK CASES WITH ELASTOMER SHOCKS




Both lids can be completely removed and re-attached simply and quickly.



Slide Mount Casters with 'spring-out' Position Stops Included

3SKB-R916U24

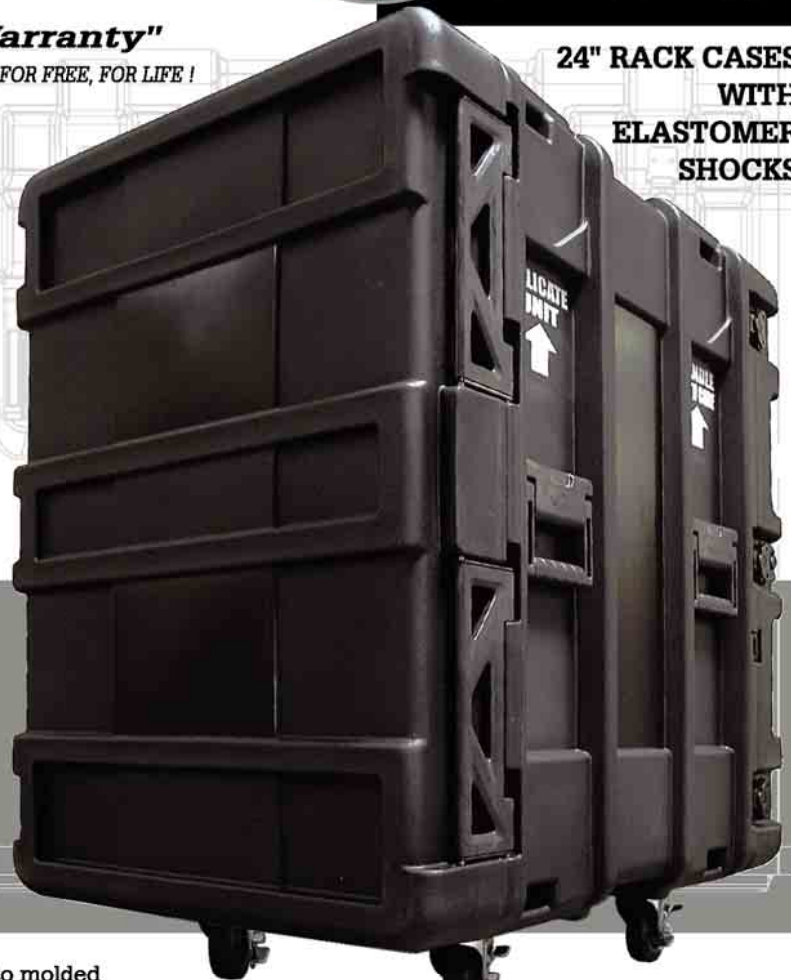

SKB's new Roto Shock Racks feature a (24" deep) roto molded tough shell with an integrally molded valance that eliminates the need for a metal valance on the outside of the case.

### FEATURES INCLUDE :

- Standard 19" rack width per EIA standards.
- Standard rack depth front to rear rail is 24" and each lid is 4.5" deep.
- Redesigned frame with threaded steel rails and aluminum cross components forming an "H" shaped rigid configuration.
- Unique "plug" style lid sealing system. Lids penetrate the body with an approximate 1" molded-in protrusion that provides outstanding sealing and anti-shear properties.
- Patent-pending compound hinge system allows the lids to swing out 270° and rest along the sides of the case or easily removed and reinstalled in seconds.
- Front and rear doors are fitted with rubber gaskets for water resistant protection.
- Recessed heavy-duty twist latches allow these cases to meet most ATA and military specifications.
- Stacks securely with wheels on or off and this revolutionary design also allows for both lids to open completely while cases are stacked.
- All sizes come standard with 8 each HM-245 elastomeric, high damping, wide temperature range shock mounts with a load range of 40 to 150 lbs.
- Additional or stiffer shock mounts may be ordered from the factory and are easily field-installed (call for details & availability).
- Standard high quality slide-in/out locking swivel 4" casters rated at 1,200 lbs.
- Automatic ambient pressure equalization valve (MIL-STD-648C)
- Black powder coated stainless steel key-lockable latches.
- Comfortable, spring-loaded, rubber over-molded handles.

Standard dimensions -  
front to rear rail: 24"

Part #	Rack Units	Height	Lid Depth
3SKB-R904U24	4 space	7"	4-1/2"
3SKB-R906U24	6 space	10-1/2"	4-1/2"
3SKB-R908U24	8 space	14"	4-1/2"
3SKB-R910U24	10 space	17-1/2"	4-1/2"
3SKB-R912U24	12 space	21"	4-1/2"
3SKB-R914U24	14 space	24-1/2"	4-1/2"
3SKB-R916U24	16 space	28"	4-1/2"

SKB Compound hinge technology allows 270 door swing range even when cases are in a stacked position



relief valves



elastomers



3SKB-R916U24



www.skbcases.com

MUSIC PRODUCTS 800.410.2024  
SPORTS PRODUCTS 800.654.5992  
INDUSTRIAL PRODUCTS 800.783.0087