


ZERO KNOWS

19" RACKMOUNT CASES

WARRIOR™ WITH REMOVABLE RACK

BUYERS GUIDE AND PART NUMBER BUILDER

SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE FOR QUESTIONS, CALL 1.800.959.5050, FOR A QUOTE CALL, FAX OR EMAIL

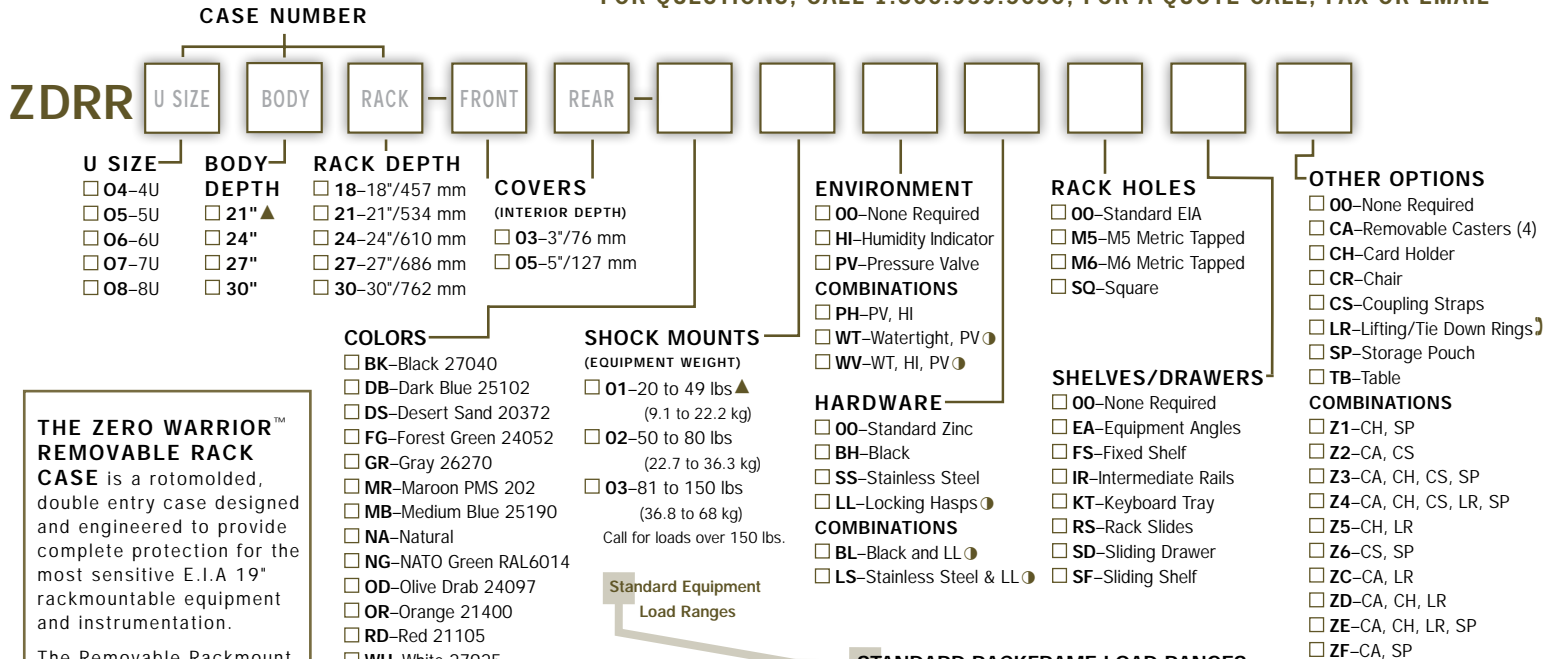

THE ZERO WARRIOR™ REMOVABLE RACK CASE is a rotomolded, double entry case designed and engineered to provide complete protection for the most sensitive E.I.A 19" rackmountable equipment and instrumentation.

The Removable Rackmount Case meets the rigors of virtually all conditions including extreme altitude, rain, sleet, snow, sand, temperatures, and dust.

- KEY FEATURES**
- Shock-mounted Removable Rack
 - Flexibility to build to custom needs
 - Strong, lightweight polyethylene construction
 - Portable, stackable and rugged
 - Variety of standard & custom finishes and colors

- COLORS**
- BK-Black 27040
 - DB-Dark Blue 25102
 - DS-Desert Sand 20372
 - FG-Forest Green 24052
 - GR-Gray 26270
 - MR-Maroon PMS 202
 - MB-Medium Blue 25190
 - NA-Natural
 - NG-NATO Green RAL6014
 - OD-Olive Drab 24097
 - OR-Orange 21400
 - RD-Red 21105
 - WH-White 27925
 - YW-Yellow 23785
- Color numbers to FED-STD-595 for reference.

Standard Equipment Load Ranges

STANDARD RACKFRAME LOAD RANGES

Shock Mounts Per System	Load Ranges (lbs/kg) For Equipment Installed in Rack
8 ea	20 to 49 lbs / 9.1 to 22.2 kg
8 ea	50 to 80 lbs / 22.7 to 36.3 kg
8 ea	81 to 150 lbs / 36.8 to 68.1 kg

Lifting Rings: Verify the application does not exceed the load carrying capacity of the lifting rings or case.
Stacking: Verify weight and support.
Shock Mounts: Equipment loads over 150 lbs (68 kg).

NOTES:
 Quick-Ship not available for Removable Rack Cases.
 ▲ Select #01 Shock Mounts for 21" Case Body.
 ● Watertight Valve not available with Locking Hasps.

Contact Sierra Cases for engineering assistance, questions and specific colors. Call 888.880.7728.



Sierra Cases | 6140 S. Gun Club Road, Aurora, CO 80016
 888-880-7728 | sales@sierracases.com | SierraCases.com


ZERO KNOWS

19" RACKMOUNT CASE WITH REMOVABLE RACK

Four Rapid Release Spring-Loaded Captive Fasteners



Heavy Duty Handles



EZ-Glide™ Nylon Rails



Mid-stop Position Allows for Slide-out Operation and Service

Rugged Steel Rails

Pressure Relief Valve



TO LEARN MORE ABOUT ZERO'S WARRIOR™ RACK MOUNT CASES VISIT SierraCases.com

WARRIOR™ ZDRR 4U-8U	EIA UNITS	BODY DEPTH	RACK DEPTH	COVER HEIGHT	CASE HEIGHT	VOLUME	WEIGHT	SWAY	ZERO PART#	NSN
	in./mm A	in./mm B	in./mm C	in./mm D + E	in./mm F	cubic ft./m	lb./kg	+/-		
<p>WARRIOR ZDRR includes a Removable, Shock Mount 19" Rack.</p> <p>All weights are approximate.</p> <p>Std load range: 20-80 lbs (9.1-36.3 kg)</p> <p>+/- = Sway space to be increased or decreased dependent on selection.</p> <p>Drawing Specifications:</p> <p>Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm)</p> <p>Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm)</p> <p>Case Width G = 27.25 in (692 mm)</p>	4U 7.12" (181 mm)	21/534	18/457	9/229	16.00/406	7.7/.22	51.0/21.2		ZDRR042118-0303	
				11/279		7.9/.22	52.0/21.7	ZDRR042118-0305		
				13/330		8.4/.24	53.0/22.6	ZDRR042118-0505		
		24/610	21/534	9/229	16.00/406	8.4/.24	56.0/24.4	ZDRR042421-0303		
				11/279		8.7/.25	57.0/24.9	ZDRR042421-0305		
				13/330		9.2/.26	58.0/25.8	ZDRR042421-0505		
	27/686	24/610	9/229	16.00/406	8.4/.24	58.5/26.0	ZDRR042724-0303			
			11/279		8.7/.25	59.5/26.5	ZDRR042724-0305			
			13/330		9.2/.26	60.5/27.4	ZDRR042724-0505			
	30/762	27/686	9/229	16.00/406	8.4/.24	61.0/27.6	ZDRR043027-0303			
			11/279		8.7/.25	62.0/28.1	ZDRR043027-0305			
			13/330		9.2/.26	64.0/29.0	ZDRR043027-0505			
5U 8.87" (225 mm)	21/534	18/457	9/229	17.75/451	8.0/.23	64.5/29.2	ZDRR052118-0303			
			11/279		8.8/.25	65.5/29.7	ZDRR052118-0305			
			13/330		9.3/.26	67.5/30.6	ZDRR052118-0505			
		24/610	21/534	9/229	17.75/451	8.9/.25	71.5/32.4	ZDRR052421-0303		
				11/279		9.7/.27	72.5/32.9	ZDRR052421-0305		
				13/330		10.2/.29	74.5/33.8	ZDRR052421-0505		
	27/686	24/610	9/229	17.75/451	9.8/.28	75.05/34.0	ZDRR052724-0303	8145-01-582-8695		
			11/279		10.6/.30	76.05/34.5	ZDRR052724-0305	8145-01-582-8698		
			13/330		11.1/.31	78.05/35.4	ZDRR052724-0505			
	30/762	27/686	9/229	17.75/451	10.9/.31	78.56/35.6	ZDRR053027-0303	8145-01-582-8700		
			11/279		11.4/.32	79.56/36.1	ZDRR053027-0305	8145-01-582-8704		
			13/330		12.0/.34	81.56/37.0	ZDRR053027-0505			
6U 10.63" (270 mm)	24/610	21/534	9/229	17.75/451	10.8/.31	70.22/30.2	+/-	ZDRR062421-0303		
			11/279		11.3/.32	68.22/31.2	+/-	ZDRR062421-0305		
			13/330		12.0/.34	70.72/32.1	+/-	ZDRR062421-0505		
		27/686	24/610	9/229	17.75/451	10.8/.31	71.22/32.3	+/-	ZDRR062724-0303	8145-01-582-8712
				11/279		11.3/.32	72.22/32.8	+/-	ZDRR062724-0305	8145-01-582-8718
				13/330		12.0/.34	74.22/33.7	+/-	ZDRR062724-0505	
	30/762	27/686	9/229	17.75/451	11.7/.33	74.73/33.9	+/-	ZDRR063027-0303	8145-01-582-5545	
			11/279		12.3/.35	75.73/34.4	+/-	ZDRR063027-0305	8145-01-582-5818	
			13/330		12.9/.37	77.73/35.3	+/-	ZDRR063027-0505		
	7U 12.37" (314 mm)	24/610	21/534	9/229	21.25/540	12.0/.34	71.88/32.8		ZDRR072421-0303	
				11/279		12.7/.36	72.88/33.2		ZDRR072421-0305	
				13/330		13.4/.38	74.88/34.1		ZDRR072421-0505	
27/686		24/610	9/229	21.25/540	12.0/.34	74.39/33.7		ZDRR072724-0303	8145-01-582-5824	
			11/279		12.7/.36	75.39/34.2		ZDRR072724-0305	8145-01-582-5855	
			13/330		13.4/.38	77.39/35.1		ZDRR072724-0505		
30/762	27/686	9/229	21.25/540	13.0/.37	76.90/34.9		ZDRR073027-0303	8145-01-582-5894		
		11/279		13.7/.39	77.90/35.3		ZDRR073027-0305	8145-01-582-5876		
		13/330		14.4/.41	79.90/36.2		ZDRR073027-0505			
8U 14.12" (358 mm)	24/610	21/534	9/229	21.25/540	13.0/.37	77.05/34.8	+/-	ZDRR082421-0303		
			11/279		13.7/.39	78.05/35.3	+/-	ZDRR082421-0305		
			13/330		14.5/.41	80.05/36.2	+/-	ZDRR082421-0505		
		27/686	24/610	9/229	21.25/540	13.0/.37	79.56/36.0	+/-	ZDRR082724-0303	8145-01-582-5897
				11/279		13.7/.39	80.56/36.5	+/-	ZDRR082724-0305	8145-01-582-5898
				13/330		14.5/.41	82.56/37.4	+/-	ZDRR082724-0505	
	30/762	27/686	9/229	21.25/540	14.1/.40	82.07/37.2	+/-	ZDRR083027-0303	8145-01-584-7882	
			11/279		14.8/.42	83.07/37.7	+/-	ZDRR083027-0305	8145-01-582-5909	
			13/330		15.6/.44	85.07/38.6	+/-	ZDRR083027-0505		